



UNIVERSSELITE

# LED WALL PACK LED BG004

## DESCRIPTION

Universelite series combines economical and security solution for outdoor perimeter and building facades. Designed look to deliver enhanced performance to outdoor wall-mounted lighting applications. Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.



## Specification Features

### Construction

Die Cast Aluminum Housing ensures reliability and durability. Dark Bronze finish. IP65 Wet Location Rated.

### Optical System

PC lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

### Field-Adjustable CCT / Wattage

Wattage and Color Temp. can be adjusted in the field.

### Certification

ETL Listed. All components have safety certification. DLC Premium; FCC, IP65 rated

### Photocell

Comes Standard with built-in dusk-to-dawn photocell.


### Warranty

5 year Limited Warranty



FIELD ADJUSTABLE

Photocell

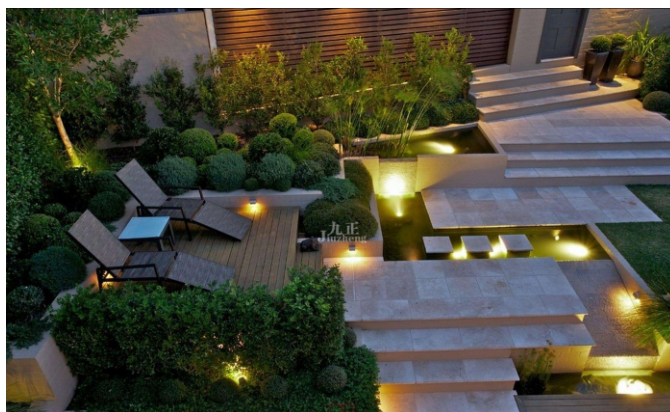

## Specification Sheet


Item No.	Dimension (mm)	Input Wattage	Lumens @5000K	Input Voltage	Color Temperature	CRI	Average Life	LED Chip	Driver
LEDBG15W004	163*165*112	15W	2100Lm	AC100-277V 50/60Hz	3000K/ 4000K/ 5000K CCT	70	54000H	2835	Universelite
LEDBG20W004		20W	2700Lm						
LEDBG30W004		30W	3750Lm						
LEDBG40W004	214*165*133	40W	5520Lm						
LEDBG50W004		50W	6600Lm						
LEDBG60W004		60W	7600Lm						
LEDBG70W004	300*165*133	70W	9450Lm						
LEDBG80W004		80W	10400Lm						
LEDBG90W004		90W	11250Lm						



UNIVERSELITE

# LED WALL PACK LED BG004

## Dimension

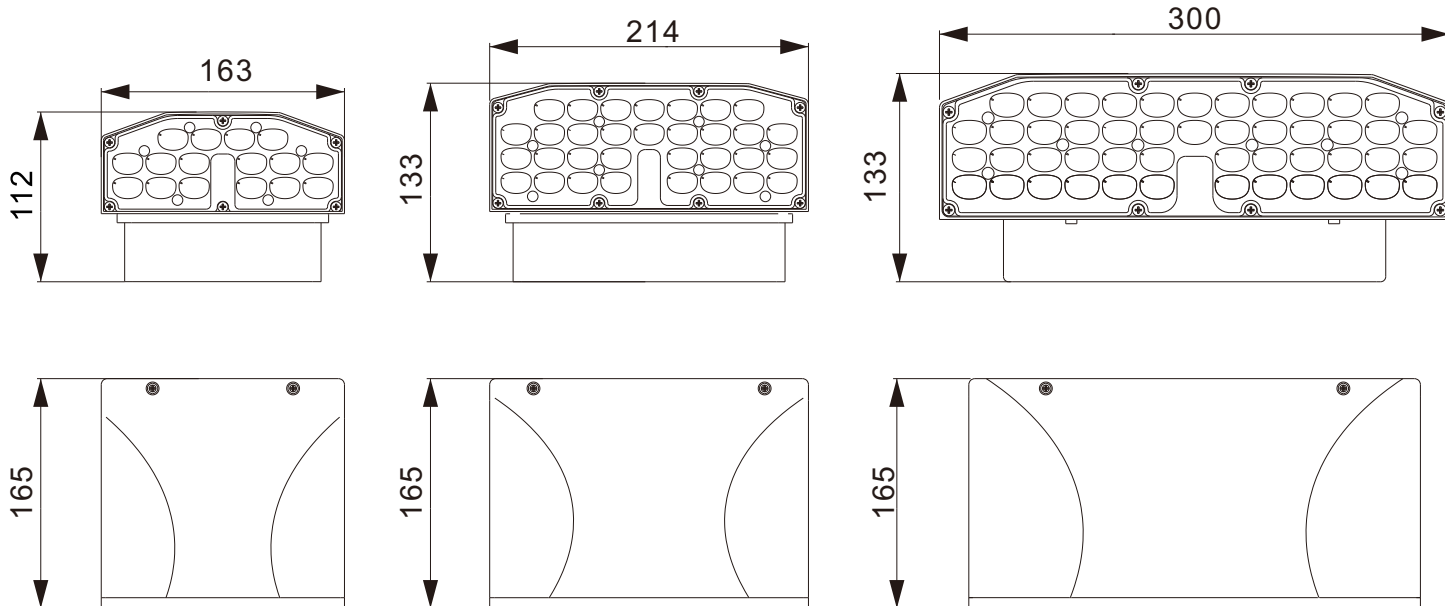

### 30W

N.W. 1.28KG  
 G.W. 1.62KG  
 Package Size 191\*195\*142MM

### 60W

1.95KG  
 2.32KG  
 240\*195\*160MM

### 90W

2.62KG  
 3.11KG  
 325\*195\*160MM

## Distribution Curve Flux

